

Intelligent LED Driver(Constant Current)


- Housing made from SAMSUNG/Covestro's V-0 flame-retardant PC materials.
- Ultra small, thin and lightweight, screwless end cap.
- Supports DALI-2, Push DIM, and corridor light DIM modes.
- Parameters such as output current and DALI address can be changed via the mobile phone APP through NFC. Advanced templates such as groups and scenes can also be set up to achieve the data interaction function of the driver.
- Current step value as low as 1mA by NFC setting, with higher compatibility and more precision
- It supports the CLO light decay compensation function to ensure constant illumination brightness.
- It supports online OTA (Over-The-Air) upgrade of the device firmware.
- T-PWM ultra-deep dimming technology, dimming depth can reach 0.01%.
- Soft-on and fade-in dimming function enhances your visual comfort.
- 0-100% full dimming without visible flicker, high frequency exemption assessment level.
- EU ERP no-load power consumption, network standby power consumption < 0.5W.
- No-load 0V output to prevent damage to LED lamps due to poor contact.
- Overheat, over voltage, overload, short circuit protection and automatic recovery.
- Suitable for Class I/II/III indoor light fixtures.
- Normal service life can reach 100,000 hours.
- 5-year warranty (Rubycon capacitor).



T-PWM
Dimming Technology

Flicker Free
IEEE1789

Dimmable: **NFC**, CLO, EL
1:10000

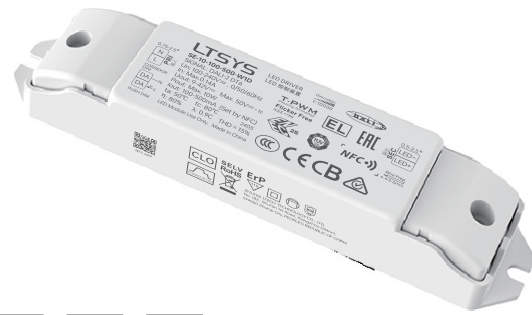


Technical Specs

Model	SE-10-100-500-W1D		SE-10-500-1000-W1D	
Features	Output Type	Constant current		
	Dimming Interface	DALI-2 DT6, PUSH DIM		
	Output Feature	Isolation		
	Protection Grade	IP20		
	Insulation Grade	Class II (Suitable for class I / II / III light fixtures)		
OUTPUT	Output Voltage	9-42Vdc	2-12Vdc	
	Maximum output voltage	≤50Vdc	≤20Vdc	
	Output Current Range	100-500mA	500-1000mA	
	Output Power Range	0.9W-10W	1W-10W	
	Dimming Range	0~100%, down to 0.01%		
	LF Current Ripple	< 5% ((Maximum current for non dimming state)		
	Current Accuracy	±5%		
	PWM Frequency	≤3600Hz		
INPUT	DC Voltage Range	100-240Vdc		
	AC Voltage Range	100-240Vac		
	Rated Voltage	115Vac/230Vac		
	Frequency	0/50/60Hz		
	Input Current	≤0.14A/115Vac(at full load) , ≤0.07A/230Vac(at full load)		
	Power Factor	PF≥0.95/115Vac(at full load), PF≥0.9/230Vac(at full load)		
	THD	THD≤15%/230Vac(at full load)		
	Efficiency (Typ.)	80%(at full load)	78%(at full load)	
	Inrush Current	Cold start 15A(Test twidth=102us tested under 50% Ipeak)/230Vac		
	Anti Surge	L-N:2KV		
Leakage Current	Max.0.24mA			
ENVIRONMENT	Working Temperature	ta: -20°C ~ 50°C tc: 80°C		
	Working Humidity	20 ~ 95%RH, non-condensing		
	Storage Temperature/Humidity	-40 ~ 80°C/10~95%RH		
	Temperature CoeScient	±0.03%/°C(-20°C~45°C)		
	Vibration	10~500Hz, 2G 12min/1cycle, 72 min for X, Y and Z axes respectively		
PROTECTION	Overload Protection	Automatically protect the device when the load exceeds 102% of the rated power. Automatically recover once load is reduced		
	Overheat Protection	Intelligently adjust or turn or the current output if the PCB temperature ≥110°C. When the PCB temperature <90°C, automatically recover normal output		
	Overvoltage Protection	Automatically protect the device when voltage exceeds the no-load voltage. It can be recovered automatically		
	Short Circuit Protection	Enter hiccup mode if short circuit occurs, and recover automatically		
SAFETY & EMC	Withstand Voltage	I/P-O/P:3750Vac		
	Insulation Resistance	I/P-O/P: 100MΩ/500VDC/25°C/70%RH		
	Safety Standards	CCC	China	GB19510.1, GB19510.14, GB19510.213
		TUV	Germany	EN61347-1, EN61347-2-13, EN62493
		CB	CB Member States	IEC61347-1, IEC61347-2-13
		CE	EuropeanUnion	EN61347-1, EN61347-2-13, EN62384
		KC	Korea	KC61347-1, KC61347-2-13
		EAC	Russia	IEC61347-1, IEC61347-2-13
		RCM	Australia	AS61347-1, AS61347-2-13
		ENEC	Europe	EN61347-1, EN61347-2-13, EN62384
		UKCA	Britain	BSEN61347-1, BSEN61347-2-13, BSEN62493
		BIS	India	IS15885(PART2/SEC13)
	EMC Emission	CCC	China	GB/T17743, GB17625.1
		CE	EuropeanUnion	EN55015, EN61000-3-2, EN61000-3-3, EN61547
		KC	Korea	KN15, KN61547
EAC		Russia	IEC62493, IEC61547, EH55015	
RCM		Australia	EN55015, EN61000-3-2, EN61000-3-3, EN61547	
UKCA	Britain	BSENIEC55015, BSENIEC61000-3-2, BSEN61000-3-3, BSEN61547		
EMC Immunity	EN61000-4-2,3,4,5,6,8,11,EN61547			
ErP	Power Consumption	Networked standby	< 0.5W(After shutdown by command)	
		No-load power consumption	< 0.5W(When the lamp is not connected)	
	Flicker/Stroboscopic Effect	IEEE1789	Meet IEEE 1789 standard/High frequency exemption level	
	DF	CIE SVM	PstLM≤1.0, SVM≤0.4	
OTHERS	Weight(N.W.)	80g±10g		
	Dimensions	135×30×20mm(L×W×H)		


Product Size

Unit:mm

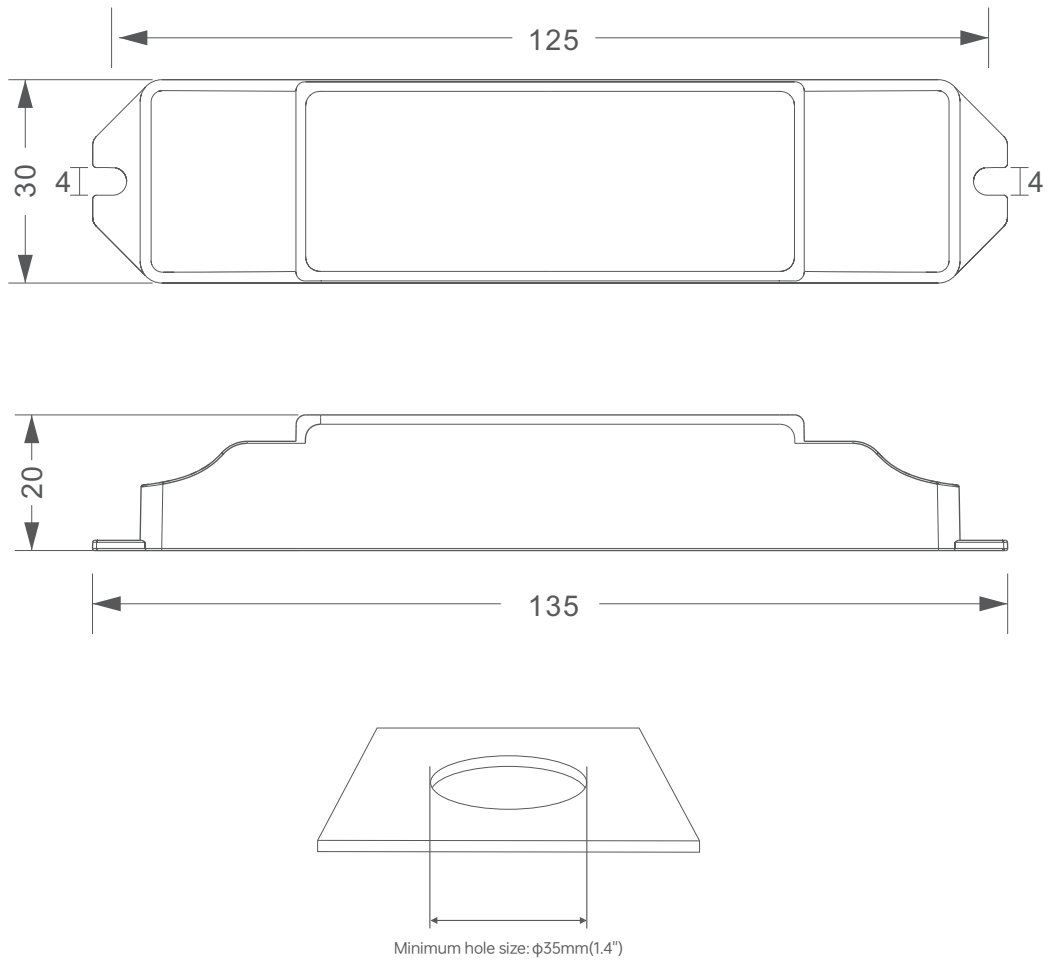

DALI Dimming Application

Wiring diagram

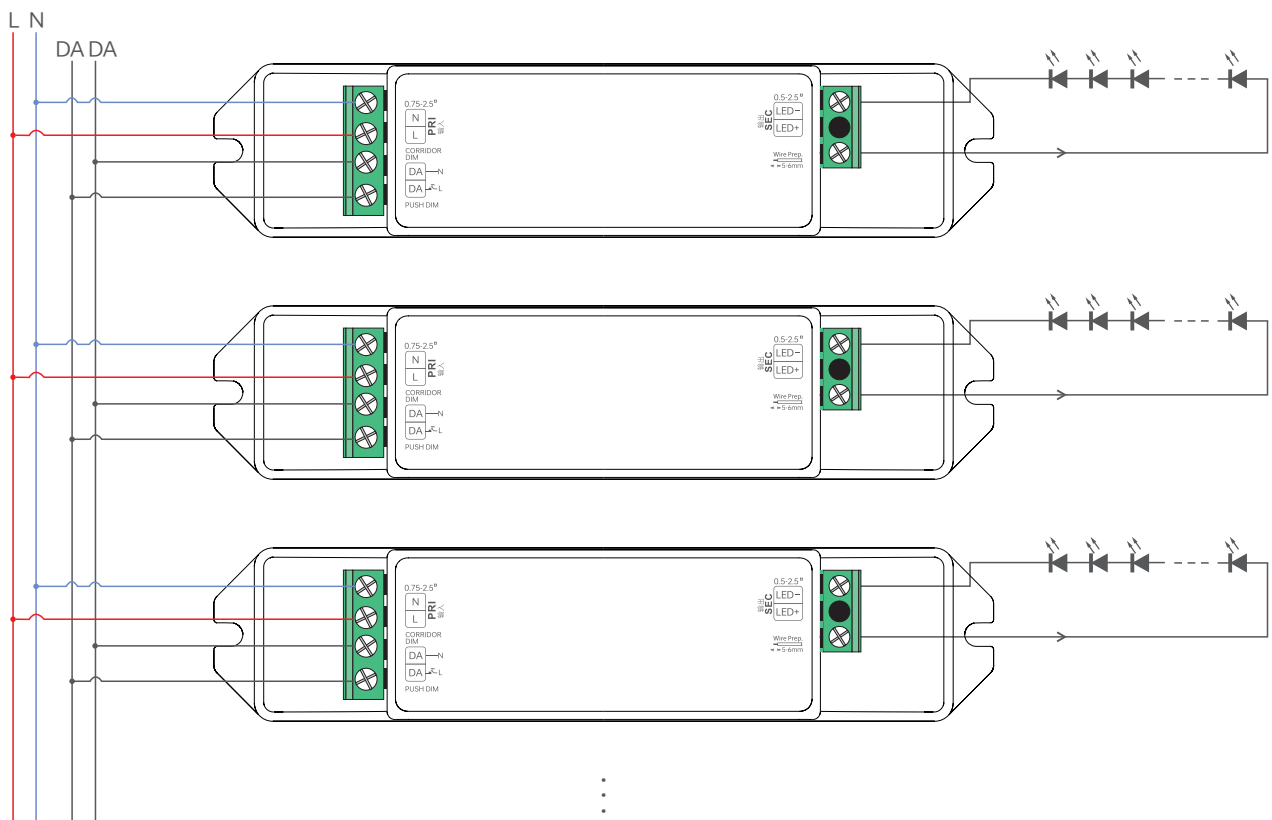

Wire diameter: 0.75-2.5^ø
Strip length: 5mm-6mm


Wire diameter: 0.5-2.5^ø
Strip length: 5mm-6mm

Switch to DALI Dimming Mode

After installation according to the wiring diagram of the DALI dimming application, the driver will automatically switch to the DALI dimming mode upon receiving any DALI command.

PUSH DIM Dimming Application

Wiring diagram

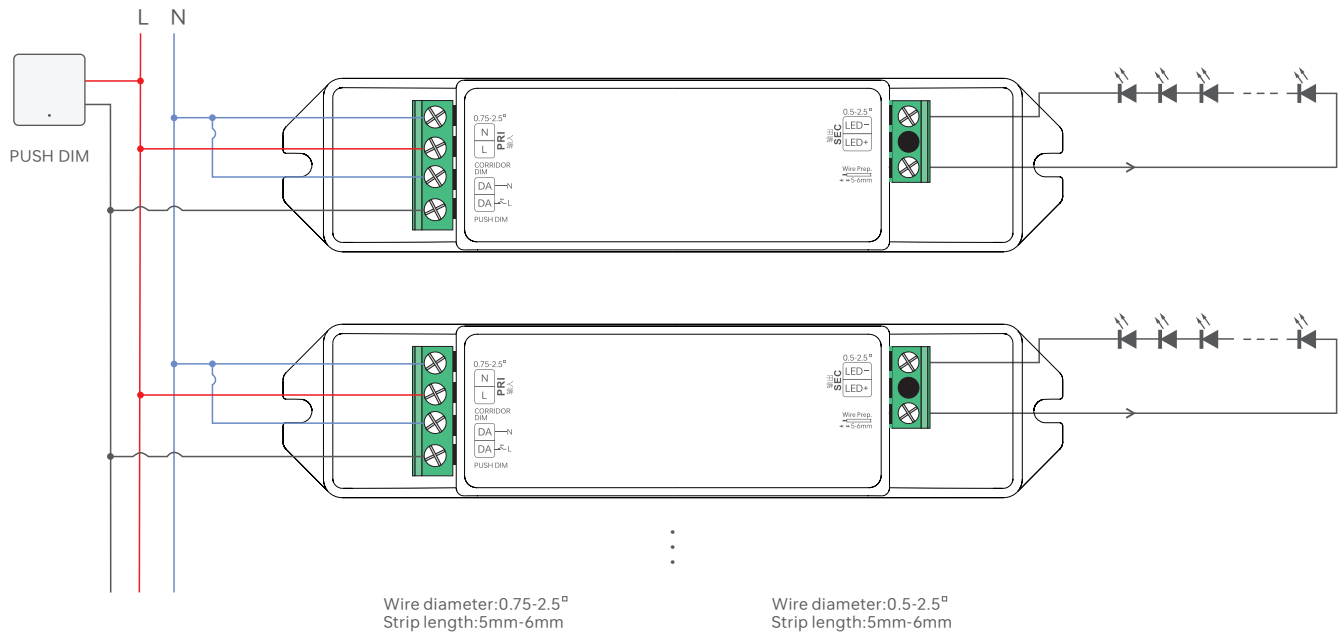

Switch to the Push-DIM dimming mode

Switch to the Push-DIM Dimming Mode

Method 1: If it has been switched to the corridor dimming mode, connect the wires according to the Push-DIM wiring diagram. Within 3 seconds of resetting the switch, press it briefly 5 times; then press and hold it for 6 seconds; finally, press it briefly 5 times within 3 seconds. The driver will automatically switch to the Push-DIM dimming mode.

Method 2: If it is switched to the corridor mode, you can switch to the Push-DIM dimming mode via the NFC Lighting app.

Remarks: If the DALI master controller is not connected, the factory default mode is Push-DIM mode.

Operation Instructions



PUSH DIM


Short press for on/off control.

Long press: Adjust the current brightness.

Push-DIM memory function: When the light is switched on/off again, it will return to the previously adjusted brightness level.

Corridor Dimming Application

Wiring diagram

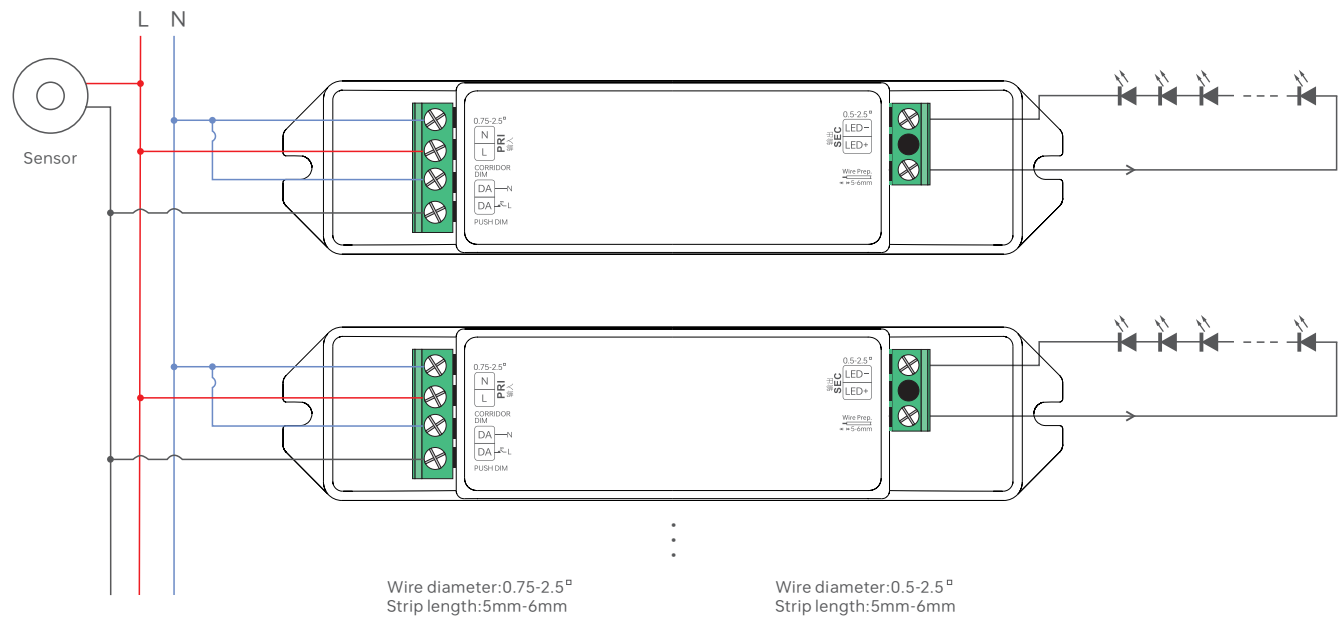

Switch to the corridor light mode

Method 1: Configure and switch the corridor light function via NFC, and the Push DIM function will be turned off.


Method 2: After connecting the wires according to the corridor dimming wiring diagram, keep moving within the effective sensing area for more than 2 minutes, and it will automatically switch to the corridor dimming mode with all lights on at full brightness.

Method 3: After connecting the wires according to the corridor dimming wiring diagram, first replace the sensor with a common switch, then turn on the common switch and keep it conducting for 2 minutes. The driver will automatically switch to the corridor dimming mode. After that, remove the common switch and replace it with the sensor again.


Remarks: During normal operation, it is recommended to set the hold-time of the motion sensor to the minimum.

It is necessary to select a motion sensor with an AC switch.

Corridor Dimming: Working Process

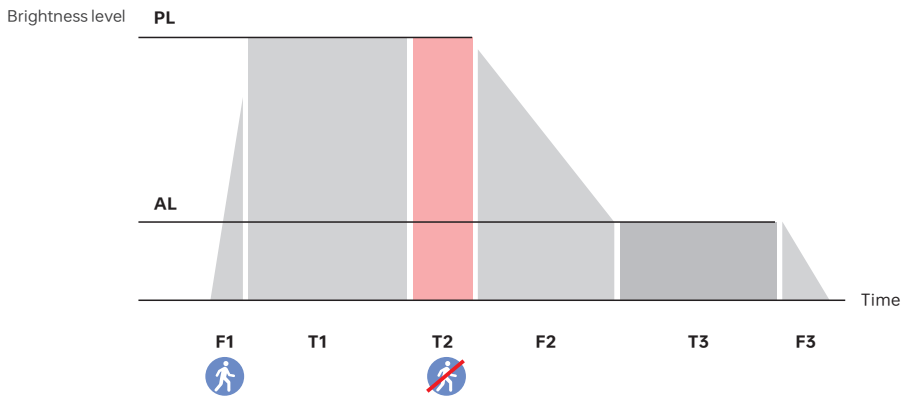

Name	Default	Setting Range
(F1) Gradual Entry Sensing Time	1 s	0-100 s
(PL) Sensing Brightness	255	0-255
(T1) Sensing Holding Time	Set through the sensor	
(T2) Delay Time	30 s	0 s, 5 s, 10 s, 20 s, 30 s, 45 s, 1 min, 2 s, 3 s, 5 s, 10 s, 20 s, 30 s
(F2) Gradual Exit Sensing Time	1 s	0-100 s
(AL) Standby Brightness	100	0-255
(T3) Sensing Standby Time	30 s	0 s, 5 s, 10 s, 20 s, 30 s, 45 s, 1 min, 2 mins, 3 mins, 5 mins, 10 mins, 20 mins, 30 mins, Permanent
(F3) Gradual Exit to Off Time	1 s	0-100 s

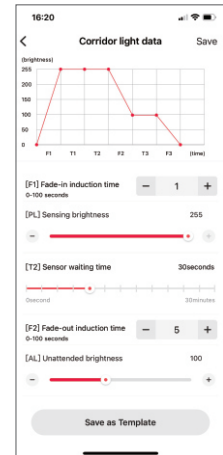





Remarks: *If the lamp needs to be on standby at a low brightness level, the [T3] Sensing Standby Time should be set to "Permanent".
*The above parameters are set through the NFC lighting APP.

Typical Current Corresponding Parameter Table

Model	The typical 9 current data sets below are for reference when selecting LED fixture models. More current levels can be set by NFC using mobile APP with 100-500mA adjustable in 1mA step									
	Output Current	100mA	150mA	200mA	250mA	300mA	350mA	400mA	450mA	500mA
SE-10-100-500-W1D	Output Voltage	9-42Vdc	9-42Vdc	9-42Vdc	9-40Vdc	9-33Vdc	9-28.5Vdc	9-25Vdc	9-22Vdc	9-20Vdc
	Output Power	0.9-4.2W	1.35-6.3W	1.8-8.4W	2.25-10W	2.7-9.9W	3.15-9.975W	3.6-10W	4.05-9.9W	4.5-10W



Model	The typical 9 current data sets below are for reference when selecting LED fixture models. More current levels can be set by NFC using mobile APP with 100-500mA adjustable in 1mA step											
	Output Current	500mA	550mA	600mA	650mA	700mA	750mA	800mA	850mA	900mA	950mA	1000mA
SE-10-500-1000-W1D	Output Voltage	2-12Vdc	2-12Vdc	2-12Vdc	2-12Vdc	2-12Vdc	2-12Vdc	2-12Vdc	2-12Vdc	2-11Vdc	2-10.5Vdc	2-10Vdc
	Output Power	1-6W	1.1-6.6W	1.2-7.2W	1.3-7.8W	1.4-8.4W	1.5-9W	1.6-9.6W	1.7-10.2W	1.8-9.9W	1.9-10W	2-10W

Installation Precautions



Please do not stack the products. The distance between two products should be $\geq 15\text{cm}$ so as not to affect heat dissipation and the lifespan of the products.
Note: The temperature within the installation area should be within the working temperature range of the products. Please do not install products inside LED fixtures to avoid temperature exceeding the working temperature that may affect the product lifetime.

Please not place the products on LED drivers. The distance between the product and the driver should be $\geq 15\text{cm}$ so as not to affect heat dissipation and shorten the lifespan of the products.



Please do not fasten the product screws tightly against the wooden board. Instead, add a washer of $\geq 7\text{mm}$ under the fixing screws. Leaving a gap can effectively dissipate heat, preventing any impact on the product's heat dissipation and service life.

Use the NFC Lighting APP

Scan the QR code below with your mobile phone and follow the prompts to complete the APP installation (According to performance requirements, you need to use a NFC-capable Android phone, or an iPhone 8 and later that are compatible with iOS 13 or higher).



* Before you begin setting the parameters of the driver, please make sure the driver is powered off .

Read/Write the LED driver

Use your NFC-capable phone to read LED driver data, then edit the parameters and they can be directly written to the driver.

1. Read the LED driver

On the APP home page, click **[Read/Write LED driver]** , then keep the programmer's sensing area close to the NFC logo of the driver to read the driver parameters.




2. Edit the parameters

Click **[Parameter settings]** to edit the advanced parameters, like output current, choose a brand, dimming mode, low power mode, dimming curve, brightness range, etc.

3. Write to the driver


After completing the parameter settings, click **[Write]** in the upper right corner, and keep the programmer's sensing area close to the NFC logo of the driver, so the parameters can be written to the driver.

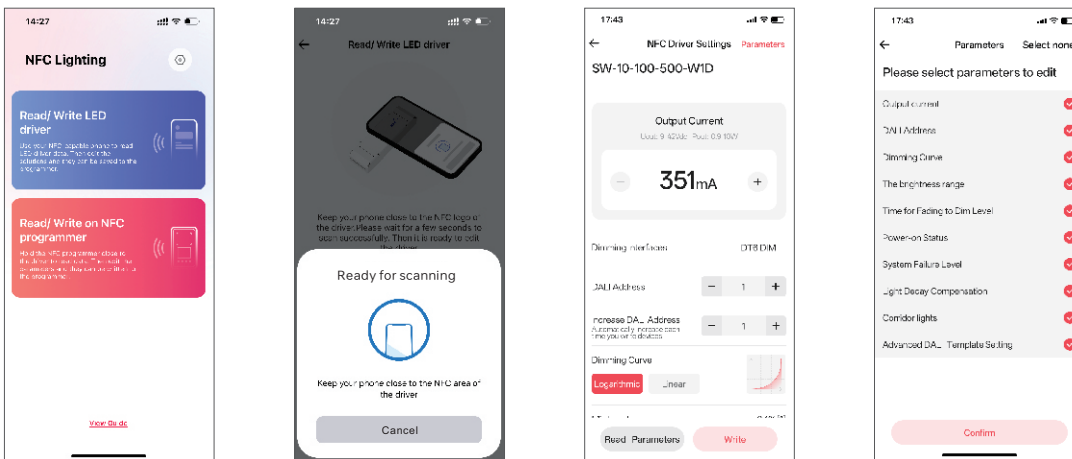

Advanced DALI template

Integrate the functions of the DALI lighting system, edit the DALI group and lighting effects for scenes, then save them in the advanced template to achieve lighting programming.





Setup page (for Read/Write LED driver) : Go to App home page — **[⊙]** icon in the top right — **[DALI template on phone]**

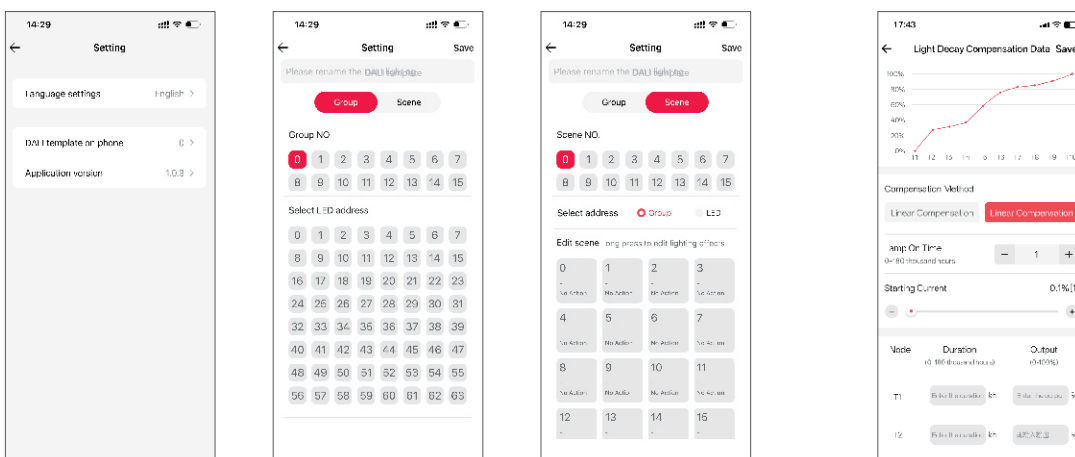





Light Decay Compensation

The light decay compensation function is mainly used to maintain the constant lumen output of LEDs. Throughout the entire life cycle of an LED, the driving current of the LED is gradually increased to offset the light decay caused by long-term operation of the LED, thereby ensuring a constant luminous flux output of the LED.

Relationship Diagrams

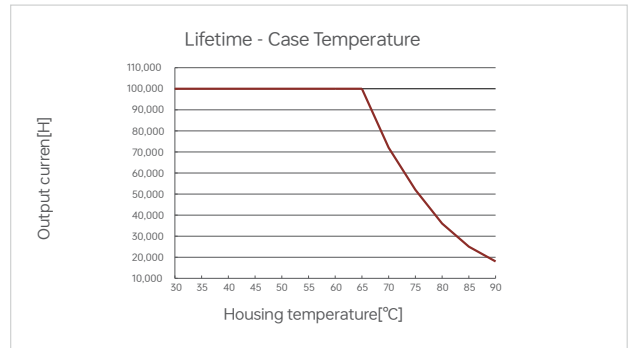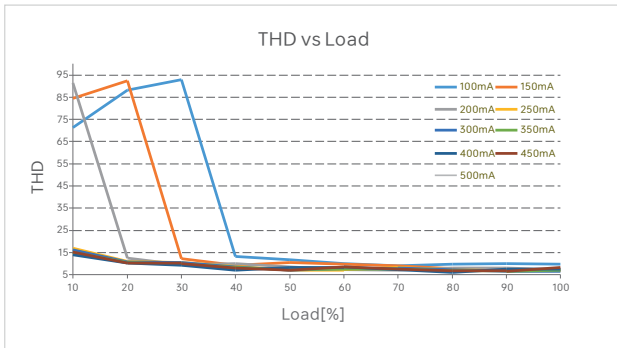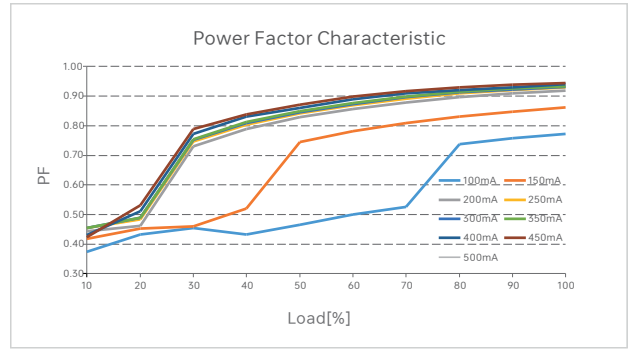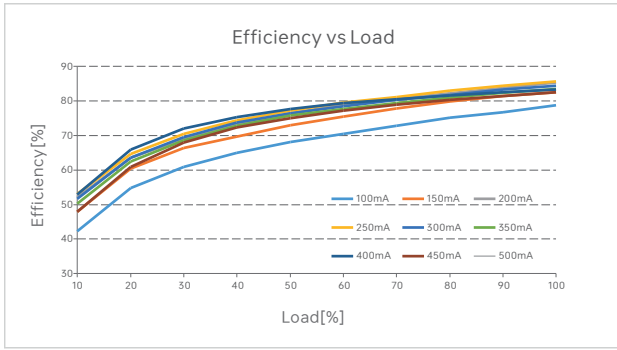

SE-10-100-500-W1D

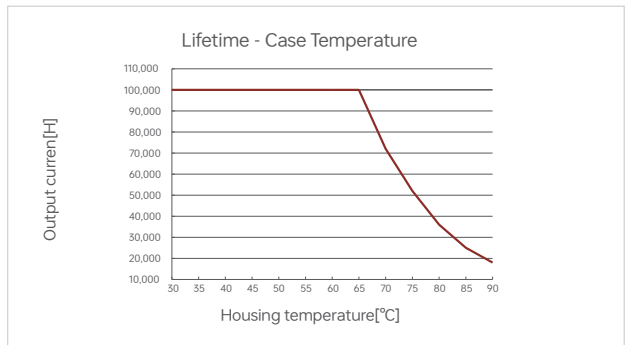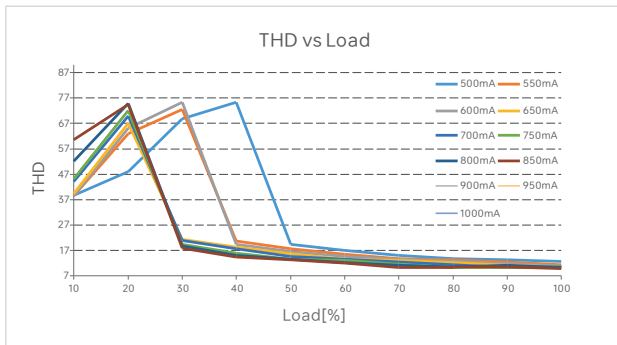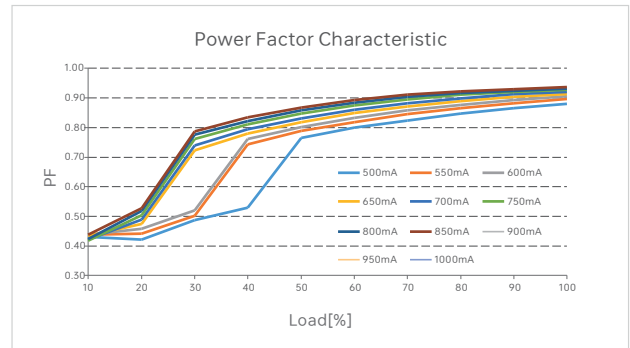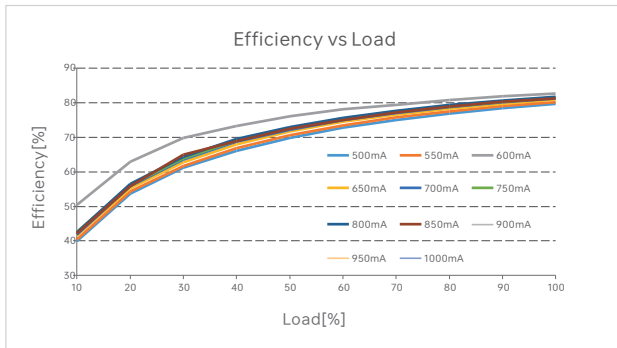

SE-10-500-1000-W1D


Surge Current & Corresponding Miniature Circuit Breaker (MCB) Load Capacity Table

MCB Model	B10	B13	B16	B20	B25	C10	C13	C16	C20	C25	D10	D13	D16	D20	D25
Maximum Load Capacity	20	26	32	40	40	23	30	37	47	58	27	34	42	53	66

Remarks:

1. Test Conditions: Cold start 15A(Test twidth=102us tested under 50% Ipeak)/230Vac
2. The number of supported drivers may vary depending on the brand and model of the MCB.
3. It is recommended not to exceed the specified load capacity during on-site installation. The actual load should be determined based on field conditions.
4. If the ambient temperature exceeds 30°C or multiple MCBs are installed side by side, the number of installed drivers must be reduced and recalculated accordingly.
5. Electricians typically use Type B MCBs for residential lighting and Type C MCBs for commercial lighting applications.
6. Different testing equipment may yield variations in measured current peaks and pulse widths. Always use professional-grade instruments for accurate testing.

Flicker Test Sheet

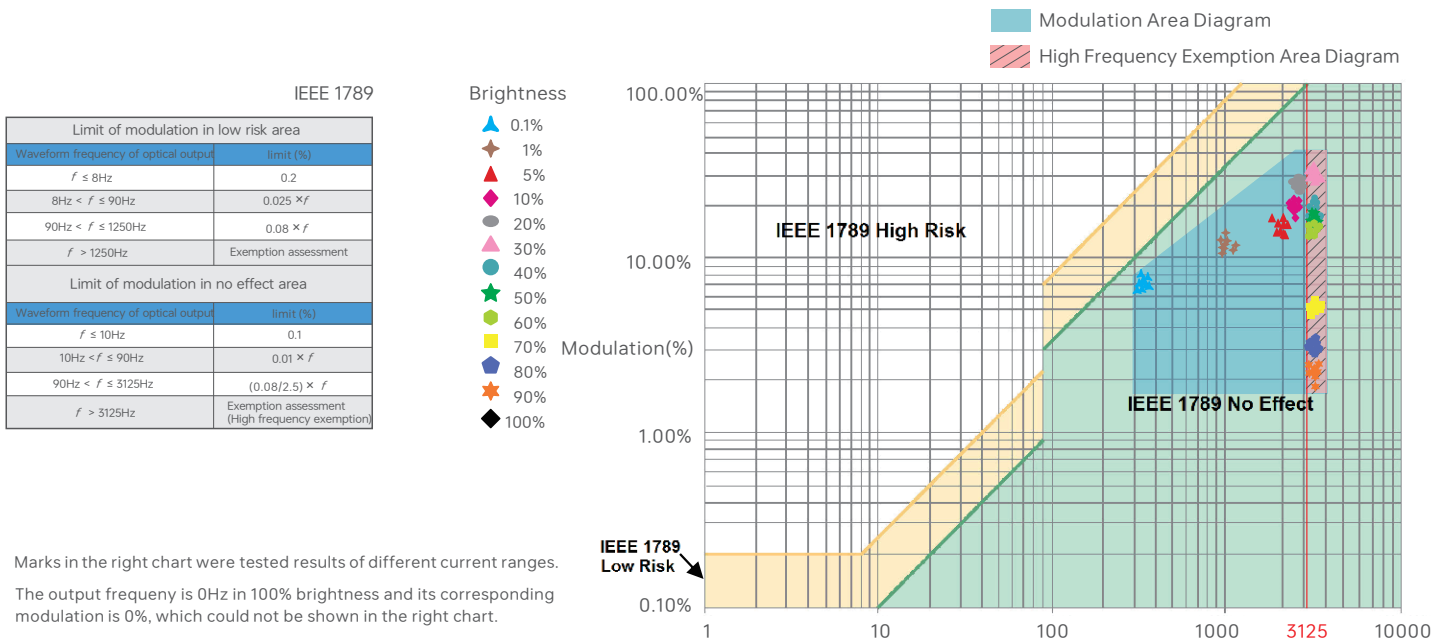

Packaging Specifications

Model	SE-10-100-500-W1D/SE-10-500-1000-W1D
Carton Dimensions	350×285×180mm (L×W×H)
Quantity	30 PCS/Layer; 5Layers/Carton;150 PCS/Carton
Weight	0.08kg/PC; 12±5% kg/Carton

Packaging Image



Inner Packaging Box



Carton Packaging

Transportation and Storage

1. Transportation

Products can be shipped via vehicles, boats and planes.

During transportation, products should be protected from rain and sun. Please avoid severe shock and vibration during the loading and unloading process.

2. Storage

The storage conditions should comply with the Class I Environmental Standards. The products that have been stored for more than six months are recommended to be re-inspected and can be used only after they have been qualified.

Attentions

- Products shall be installed by qualified professionals.
 - LTECH products are and not lightningproof non-waterproof (special models excepted). Please avoid the sun and rain. When installed outdoors, please ensure they are mounted in a water proof enclosure or in an area equipped with lightning protection devices.
 - Good heat dissipation will prolong the working life of products. Please ensure good ventilation.
 - Please check if the working voltage used complies with the parameter requirements of products.
 - The diameter of wire used must be able to load the light fixtures you connect and ensure the firm wiring.
 - Before you power on products, please make sure all the wiring is correct in case of incorrect connection that causes damage to light fixtures.
 - If a fault occurs, please do not attempt to fix products by yourself. If you have any question, please contact your suppliers.
- * This manual is subject to changes without further notice. Product functions depend on the goods. Please feel free to contact our official distributors if you have any question.

Warranty Agreement

- Warranty periods from the date of delivery: 5 years.
- Free repair or replacement services for quality problems are provided within warranty periods.

Warranty exclusions below:

- Beyond warranty periods.
- Any artificial damage caused by high voltage, overload, or improper operations.
- Products with severe physical damage.
- Damage caused by natural disasters and force majeure.
- Warranty labels and barcodes have been damaged.
- No any contract signed by LTECH.

1. Repair or replacement provided is the only remedy for customers. LTECH is not liable for any incidental or consequential damage unless it is within the law.
2. LTECH has the right to amend or adjust the terms of this warranty, and release in written form shall prevail.

Update Log

Version	Updated Time	Update Conten	Updated by
A0	20250418	Original version	Simin Zhong